

General Features


- Engine (DOOSAN P126TI-II), Radiator 40⁰C max, belt driven fans, with safety guard
- 24V charge alternator
- Alternator (AGG KI444D like STAMFORD), single bearing alternator IP23, insulation class H/H
- Skid and vibration isolators
- Dry type air filter, fuel filter, oil filter
- Main line circuit breaker
- Standard control panel
- Two 12V batteries, rack and cable
- Ripple flex exhaust pipe, exhaust siphon, flange, industrial muffler

PHOTO FOR REFERENCE ONLY



Technical Data

Output Frequency	60 Hz
Rated Speed	1800RPM
Prime Power	349KVA/279KW
Standby Power	388KVA/310KW
Rated Voltage	208/120V
Phase	3
Power Factor	0.8
Fuel Consumption 100% Load	73.8L/Hr
Fuel Consumption 75% Load	56.0L/Hr
Fuel Consumption 50% Load	37.1L/Hr
Operation Altitude	≤1000m
Ambient Temperature	≤40°C

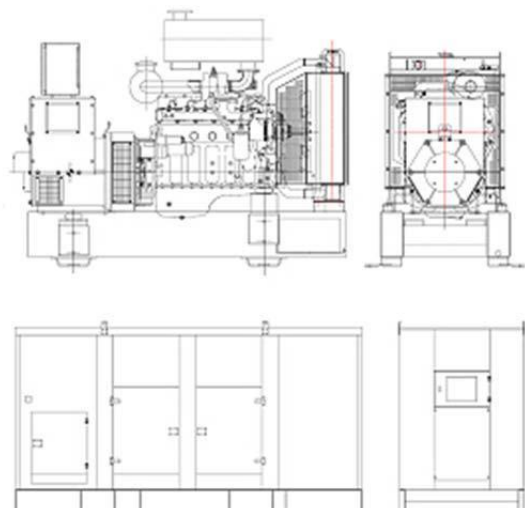

Dimension and Weight

Genset Type	Open Frame	Soundproof
Length(L) (mm)	2960	4000
Width(W) (mm)	1030	1380
Height(H) (mm)	1690	2350
Gross Weight (kg)	2300	2915
Net Weight (kg)	2250	2865
Tank Capacity (L)	500	700

Engine Specification

Manufacturer / Model:	DOOSAN P126TI-II, 4-cycle
Air Intake System:	Turbo, Air/Air cooling
Fuel System:	BOSCH P type fuel pump
Cylinder Arrangement:	6 in Line
Displacement:	10.051L
Bore and Stroke:	123*155 (mm)
Compression Ratio:	17:1
Rated RPM:	1800rpm
Max. Standby Power at Rated RPM:	342KW
Governor Type:	Electronic
Exhaust Gas Flow:	64.2.3m ³ /min
Exhaust Temperature:	580 °C
Max Back Pressure:	6kPa
Max Intake Restriction:	6.35kPa
Burning Capacity:	28.2m ³ /min
Air Flow:	722m ³ /min
Total Oil Capacity:	25L
Oil Consumption:	≤0.5% Fuel Consumption
Total Coolant Capacity:	60L
Thermostat:	103 °C

Alternator Specification

Manufacturer / Model:	AGG KI444D like STAMFORD
Number of Phase:	3
Connecting Type:	3 Phase and 4 Wires, "Y" type connecting
Number of Bearing:	1
Protection Grade:	IP23
Exciter Type:	Brushless, self-exciting
Insulation Class, Temperature Rise:	H/H
Telephone Influence Factor (TIF):	<50
THF:	<2%
Voltage Regulation, Steady State:	≤±1%
Alternator Capacity:	388KVA
Alternator Efficiencies:	93.0%
Air Cooling Flow:	0.99m ³ /s

Control System

Standard Deepsea DSE6020 Auto Mains Failure Control Panel

- Manual or Auto Start Module for single genset applications. Designed to work with electronic and non-electronic engines, providing advanced engine monitoring and protection features.
- Includes a back-lit icon LCD display which shows the status of the engine at all times. Monitors engine speed, frequency, voltage and run hours and also displays the warning and shutdown status.
- Includes extensive outputs and inputs making this product ideal for a wide variety of applications. It can either be programmed using the front panel or by using DSE PC software.



Optional Deepsea DSE7320 Auto Mains Failure Control Panel

- Auto Mains (Utility) Failure Control Module suitable for a wide variety of single genset applications.
- Displays warnings, shutdown and engine status info on the back-lit LCD screen, illuminated LEDs, remote PC. Monitors the mains (utility) supply. Includes USB, RS232 and RS485 ports for system expansion.
- Compatible with electronic and non-electronic engines and offer flexible inputs, outputs and engine protections to meet extensive industry requirements.
- Includes enhanced event and performance monitoring, remote communications to reduce engine wear. It can either be programmed using the front panel or by using DSE PC software.



Optional Deepsea DSE8610 Auto Paralleling Control Panel

- Synchronizing Auto Start Control Module for multi-genset load share system, designed to synchronize up to 32 gensets including electronic and non-electronic engines.
- Monitors the genset and indicates operational status and fault conditions, automatically starting or stopping the engine on load demand or fault condition.
- System alarms are annunciated on the LCD screen, illuminated LED and audible sounder.
- Records 250 events log for maintenance. Extensive monitoring, metering and protection features are included as well as comprehensive communication and system expansion options.
- Using DSE PC Software allows alteration of the operational sequences, timers, alarms with all communication ports active.



Options

Engine

- Water Jacket Preheater
- Water Separator
- Oil Pump
- Oil Preheater
- Battery Charger

Fuel System

- Daily Fuel Tank
- External Fuel Tank
- Auto Fuel Filling System
- Fuel Level Sensor

Control System

- Auto Remote Control Panel
- AMF Function Control Panel
- Auto Paralleling Control Panel
- Auto Transfer Switch (ATS)
- ABB breaker

Alternator

- Anti Condensation Heater
- Permanent Magnet Generator
- Winding Temp Sensor

Enclosure

- Rainproof Type
- Soundproof Rental Type
- Mobile Type

Available Voltages

- 380V,400V,460V,480V(L-L)
- 208V,220V,230V,240V(L-L)

Reference Standards

Generator Set: ISO 8528, CE

Engine: ISO 3046, BS 5514, DIN 6271

Alternator: BS EN 60034, IEC34, BS5000, NEMA MG1-32, VDE 0530, CSA C22.2-100, AS1359

Warranty

AC&CC provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months or 1500 running hours (accumulated); subject to the earlier one, counted on the day AC&CC sold to the first buyer.

Service and spare parts are available from AC&CC or distributors in your location.